


Flameless Electric Air Heaters: Air Flow Characteristics of Triple Pass Heaters

Air flow rates up to 50 SCFM can be used with this housing, however, a regenerative blower should not be used as the back pressure is too high. The compressed air used should be filtered and regulated. Refer to the included performance curves for each wattage.


Part Number#003-10028

(3 ea.) - 2KW Elements

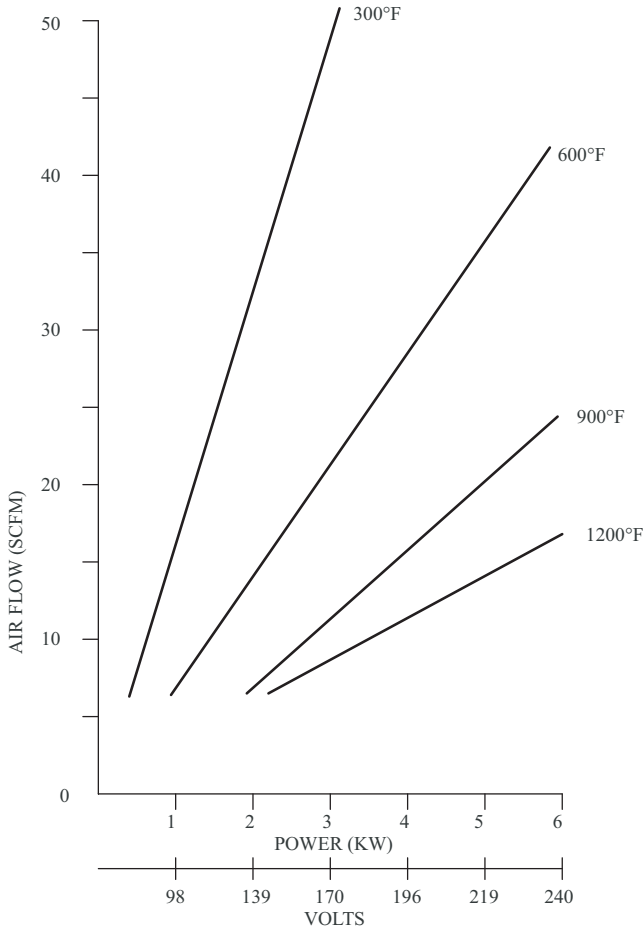


Part Number #003-10029

(3 ea.) - 2.8KW Elements

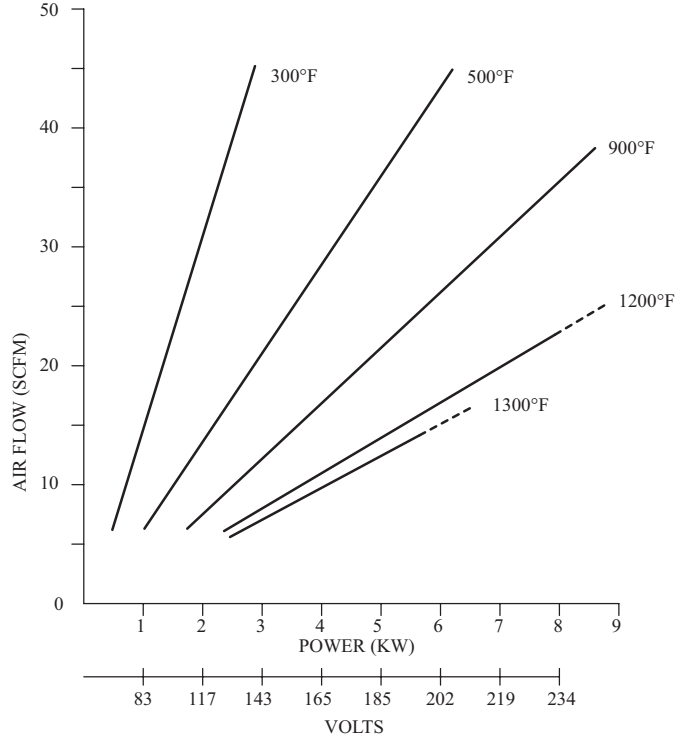

Part # 003-10030

(3 ea.) - 3.6KW Elements

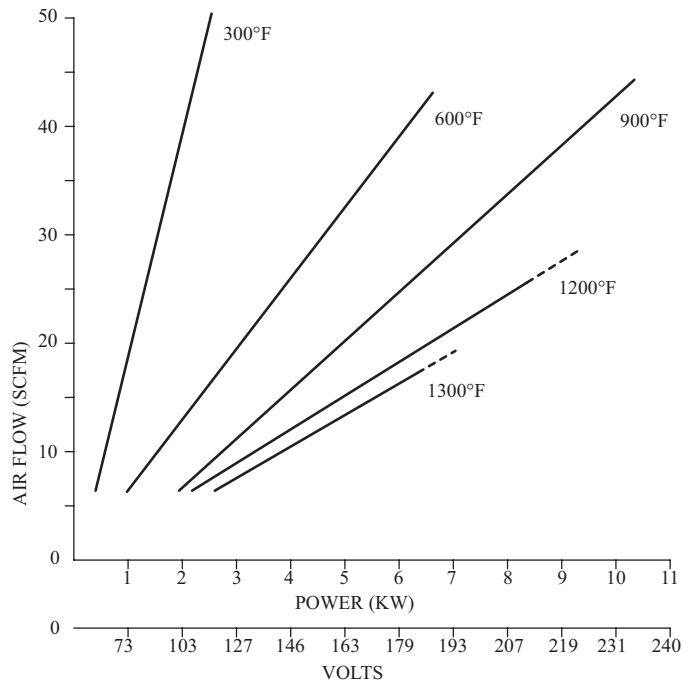

NOTE:

Broken line sections of curves indicate Reduced Heater Life Area. The filament temperature is above 1950°F. Refer to the Heater Life Curve in the technical information section (T) of our catalog.